

Request for Bids for the Middle Fork Coquille River Falls Fish Passage Project



Requested by:
Emily Kolkemo



390 N. Central Blvd
Coquille, OR 97423

Published November 25, 2024

Request for Bids for the Middle Fork Coquille River Falls Fish Passage Project

Bidders shall submit their proposal pursuant to the provisions of this solicitation as a single PDF document to:

Emily Kolkemo
Restoration Project Manager
ekolkemo@coquillewatershed.org

Subject Line: Middle Fork Coquille Falls Fish Passage Project Bid

MANDATORY PRE-BID SITE VISIT

December 16, 2024 at 10:00 a.m. at Project Site:

Park at west end of Bear Creek Frontage Road (Douglas County, OR)

Between Mile Markers 43-44

42°57'58.4"N 123°46'14.0"W

<https://maps.app.goo.gl/dmPC6sHwxESah6wY6>

Please RSVP to the site visit no later than December 13, 2024.

SOLICITATION CLOSING

January 31, 2025 at 4:00 p.m.

(LATE BIDS WILL NOT BE ACCEPTED)

Bidders are solely responsible for ensuring that the CoqWA receives the proposal. Bidders shall familiarize themselves with this entire Bid Document.

This Bid Document and engineering designs are available for request by phone (541-396-2541), and by email (ekolkemo@coquillewatershed.org)

All questions and comments about this solicitation shall be directed IN WRITING to Emily Kolkemo, CoqWA Restoration Project Manager

Email to: ekolkemo@coquillewatershed.org

INVITATION TO BID

Notice is hereby given pursuant to this Request for Bids (“RFB”) that sealed bids (a “Bid”) are requested for the Middle Fork Coquille River Falls Fish Passage Project (“Project”). Funds are provided by the National Oceanic and Atmospheric Administration (NOAA) and administered by the Coquille Indian Tribe (CIT), Natural Resources.

Work is expected to start no earlier than June 15, 2025 and continue no later than September 30, 2025. Those receiving this RFB who wish to submit a Bid (in each case, a “Bidder”) shall furnish labor, materials and equipment necessary for completion of work in accordance with the specifications provided herein.

Deadline, no later than 4:00 p.m., January 31, 2025. Bids received after this date and time will not be considered. Bid shall be sent to Emily Kolkemo, Restoration Project Manager via email at ekolkemo@coquillewatershed.org.

Included in this Request for Bids is:

Exhibit A: Bid Prospectus that includes project background, scope of work, requirements for Bidders, instructions, and required forms

Exhibit B: Bid Forms (required)

Exhibit C: Maps & Project Photographs

Exhibit D: Engineering Designs

Exhibit A: BID PROSPECTUS

LOCATION: Middle Fork Coquille River at Mainstem River mile 26.0, Bear Creek Frontage Road, Douglas County, Oregon., 42.9709, -123.7588.

MANDATORY SITE TOUR: December 16 at 10:00am at Middle Fork Coquille River Falls project site. Park at west end of Bear Creek Frontage Road (42°57'58.4"N 123°46'14.0"W), between mile markers 43 and 44 off Highway 42 in Douglas County, Oregon (<https://maps.app.goo.gl/dmPC6sHwxESah6wY6>). **To attend site visit, RSVP by December 13, 2024.**

BID DEADLINE: January 31, 2025 at 4:00 pm.

ESTIMATED START DATE: June 15, 2025

PROJECT COMPLETE: September 30, 2025

PROJECT BACKGROUND:

This project will reestablish fish passage for juvenile and adult salmonids, as well as other native fish, and maximize natural river processes at falls on the Middle Fork Coquille River (MFCR). Fish passage is currently hindered by large boulders in the channel, caused by disturbance and alteration during historic road-building activities. Restoration will consist of reducing, relocating, and/or removing selected boulders within the Middle Fork Coquille River to develop a passage channel and restore channel continuity.

The MFCR falls is in the upper watershed, approximately 25 miles upstream from the confluence with the South Fork Coquille River. The MFCR in the project area is in a narrow valley bounded by Highway 42 and the former Highway 42 alignment, now known as Bear Creek Frontage Road. Bear Creek Frontage Road is not an active roadway and is blocked at both connections to Highway 42. (see *Exhibit C: Maps & Project Photographs*)

Oregon Highway 42 was first established in 1932 with the Oregon route numbering system. Its original unpaved course dates back as far as the turn of the 20th century. Today it largely maintains its original route with the exception of some realigned segments, including the project site of this proposal, which traverses rugged terrain comprised of variable rock strata. When the old Highway 42 was built, boulders dislodged from roadcut blasting and fell or rolled into the Middle Fork Coquille River. Boulders with drilled shafts to accommodate explosives can be observed in the channel. Blasted boulders alter the flow of the river, forming 10-foot boulder-capped falls at low-to-intermediate flows. The falls recede to hyporheic flow through gaps in the boulders at baseflow and the interstitial spaces either are smaller than will allow for passage or drop through ports in the rocks. When flows increase they merge, overwhelm the flow through spaces, rising to where they overtop the large rock in the channel forming the falls. The smoothed mid and higher flow levels result in very high velocities and drop height. (see *Exhibit C: Maps & Project Photographs*)

Oregon Department of Fish & Wildlife (ODFW) has determined that the falls block approximately 50% of adult upstream migrating steelhead trout, 90% of adult upstream migrating coho salmon, and 100% of adult upstream migrating chinook salmon during an average or drier year. Restoration of natural cascading bedforms will enable or greatly improve all anadromous salmonids present in the Coquille Basin to access an upstream reach of the mainstem that receives Twelvemile Creek, a major sub-basin of the MFCR sub-

basin. An estimated 5.5 miles of coho and 10 miles of steelhead habitat exist upstream of the falls. Twelvemile Creek is the upstream most spawning tributary in the MFCR watershed, which results in a strong capacity to provide production of coho and steelhead juveniles that can subsequently rear downstream in segments of the MFCR where there are over 15 miles of usable pool rearing habitat.

In 2023, the Coquille Watershed Association, in partnership with the ODFW, contracted with River Design Group to complete engineering designs intended to provide fish passage design and technical information for channel modifications required to the remove the fish passage barrier. This project was developed in compliance with ARBO II project design criteria (see *Exhibit D: Engineering Designs* for ARBO II conservation measures).

SCOPE OF WORK:

The Proposal will require the contractor to perform construction necessary, as supported by engineering designs, at the Middle Fork Coquille River Falls (MFCR Falls). Contractor will work closely with the Coquille Watershed Association (CoqWA) Project Manager, MFCR Falls Project Team, and the contracted engineer to ensure construction actions adequately follow engineered designs and are compliant with federal and state permit requirements. This project is planned to be implemented June 15, 2025 and completion date is September 30, 2025. Contractors are required to propose a work schedule that meets all of the project objectives and fits within this timeline. The following tasks will be met and included as line items with cost estimates in the bidding:

Objective 1) Perform site modifications necessary to provide equipment access to the Middle Fork Coquille Falls channel, which will include at minimum:

- i. Install signs along Highway 42 at either end of project site entry point. Signs must be 48-inch “TRUCKS” with 18-inch “500 FEET” rider and shall be installed on 4” x 6” wood post per temporary sign placement ODOT standard. Signs shall be removed at project completion. Contractor shall provide traffic control and site access plan for approval prior to construction.
- ii. Remove approximately 50 linear feet of existing guardrail and posts. Install end pieces, save, and re-install guardrail at project completion and restore to pre-project conditions or better (see *Exhibit D: Engineering Designs*, drawing 2.3).
- iii. Protect edge of existing pavement with approximately four 4-foot by 8-foot (minimum) steel plates and asphalt patch. Remove at project completion (see *Exhibit D: Engineering Designs*, drawing 2.7).
- iv. Source and install temporary culvert at crossing (18-inch diameter minimum, approximately 20 linear feet) across drainage to match existing tributary channel elevations, provide and install general backfill/access rock, install silt fence, and remove temporary crossing at project completion (see *Exhibit D: Engineering Designs*, drawing 2.4). Fiber optic line monitor must be present during culvert placement and removal. Temporary crossing plan must be submitted and approved by contracted engineer prior to implementation.
- v. Source and mobilize materials, construct temporary channel access capable of supporting 35,000-pound tracked excavator or equivalent, and remove temporary access materials above Ordinary High Water (OHW) elevations at completion of in-water work (see *Exhibit D: Engineering Designs*, drawing 2.5). Contractor shall submit temporary access plan for review and approval by contracted engineer prior to implementation.
- vi. Provide erosion/environmental controls: Install silt fences. Stockpile woody material, native vegetation, topsoil, and natural river material displaced during construction and incorporate into

cover of disturbed areas to minimize erosion. Spread erosion control seed mix and weed-free straw on all disturbed areas outside of existing pavement. Seed mix will be provided (see *Exhibit D: Engineering Designs*, drawing 4.1).

Objective 2) Modify approximately 200 feet of the Middle Fork Coquille River channel to a target gradient of $\pm 5\%$ during the in-water work period from July 1, 2025 to September 15, 2025.

- i. Install work area isolation (care and diversion of waters) and conduct fish salvage as required in coordination with ODFW and MFCR Falls Project Team per Best Management Practices (see *Exhibit D: Engineering Designs*, drawings 2.6-2.8 and 1.1-1.4). Includes construction of a fish-exclusion berm after fish salvage is complete, using 4-inch rock sourced and mobilized by contractor. Berm will be periodically inspected and debris removed as necessary during in-water work. Berm will be notched as directed by engineer at completion of in-water channel construction.
- ii. Reduce, relocate, and/or remove existing selected boulders in channel to meet channel design profile, sections, and gradation (see *Exhibit D: Engineering Designs*, drawings 3.0-3.3).
- iii. Grade low-flow channel transitions from modified channel to existing channel and place streambed matrix in and around modified boulders as directed by engineer. Contractor will source and mobilize streambed matrix per engineer guidelines (see *Exhibit D: Engineering Designs*, drawing 3.3).
- iv. Conduct turbidity monitoring, in coordination and under guidance of MFCR Falls Project Team, during all in-water work. Will require water testing and recording results at 2-hour intervals at selected points upstream and downstream of work area while in-water work is conducted. Turbidity monitoring equipment will be provided.

**Build America Buy America Act: On November 15, 2021, President Biden signed into law the Infrastructure Investment and Jobs Act ("IIJA"), Pub. L. No. 117-58, which includes the Build America, Buy America Act ("the Act"). Pub. L. No. 117-58, §§ 70901-52. The Act requires that, no later than May 14, 2022, the head of each covered Federal agency shall ensure that "none of the funds made available for a Federal financial assistance program for infrastructure, including each deficient program, may be obligated for a project unless all of the iron, steel, manufactured products, and construction materials used in the project are produced in the United States." By May 14, 2022, agencies must ensure that all applicable programs comply with section 70914 of the Act, including by the incorporation of a Buy America preference in the terms and conditions of each award with an infrastructure project.*

EQUIPMENT CHOICE, STAGING, and CLEANING: – Heavy equipment will be commensurate with the project and operated in a manner that minimizes adverse effects to the environment and cultural resources (e.g., minimally-sized, low pressure tires, minimal hard turn paths for tracked vehicles).

A. All equipment used for work will be cleaned for petroleum accumulations, dirt, plant material (to prevent the spread of noxious weeds), and leaks prior to entering the project area. Such equipment includes large machinery, stationary power equipment (e.g., generators, canes), and gas-powered equipment with tanks larger than five gallons.

B. Store and fuel equipment on existing gravel roads after daily use.

C. Inspect daily for fluid leaks before leaving the vehicle staging area for operation. If equipment is found to be leaking during project work, all activity shall immediately cease until mechanical issues are addressed.

D. Thoroughly clean equipment before operation below ordinary high water or within 50 feet of any natural water body or areas that drain directly to streams or wetlands and as often as necessary during operation to remain grease free.

SITE ACCESSES: Minimize the number of temporary access roads and travel paths to lessen soil disturbance and compaction and impacts to vegetation.

FIRE RESTRICTIONS: The Contractor shall know and adhere to all fire rules and restrictions that apply to the project area, during implementation. Contractor shall provide adequate tools and equipment to meet fire restriction requirements. Contractor shall be in default of contract should project be delayed for lack of required fire equipment preventing work that could have otherwise been completed.

SPILL PLAN: The Contractor shall have and be ready to deploy a spill kit in response to any leaks/spills of petroleum products or other contaminants. A spill plan will be provided, but spill kits must be provided by the Contractor. If equipment is found to be leaking during project work, all activity shall immediately cease until mechanical issues are addressed.

INADVERTENT DISCOVERY PLAN: An Inadvertent Discovery Plan (IDP) will be provided for directions in case of uncovering cultural resources during ground disturbing activities. Prior to commencing work, a meeting with the Project Manager must occur to overview the IDP protocols. The IDP will also be attached as an exhibit within the contract.

EXAMINATION OF SITE, BID DOCUMENTS, PERMITS, ETC.: Before submitting a Bid, each Bidder shall be responsible for: (i) becoming fully acquainted with the site and the conditions relating to the work, in order to understand fully the facilities, difficulties, and restrictions attending the execution of the Work; (ii) carefully examining each component of the Bid Documents and any other available supporting data, in order to become thoroughly familiar with all of the requirements; and (iii) obtaining for itself, at its own cost and expense, copies of all agency and association guidelines and standards cited in the proposed Contract and necessary to perform the Work. No failure or omission of any Bidder to receive or examine any such information or to visit the Site and become acquainted with the conditions existing at the Site shall in any way relieve such Bidder from obligations with respect to its Bid, any Contract entered into with such Bidder, or the Work, and the submission of a Bid shall be taken as *prima facie* evidence of compliance by the submitting Bidder per the requirements of this paragraph.

SELECTION AND EVALUATION CRITERIA: Proposals will be evaluated by a Selection Committee that, after a review of written proposals, may choose to also conduct a personal interview. Selection Committee may include the CoqWA Director, CoqWA Project Manager, CoqWA Restoration Project Coordinator, and/or members of MFCR Falls Project Team. Bid evaluation will be based on the ability of the Bidder to meet the specifications for the tasks described in this RFB in a timely fashion. Selection will also be based on the ability of the Bidder to work in a cooperative manner with CoqWA staff and project partners on the Project. CoqWA will generally not disclose the status of any award until the appropriate authority at CoqWA has approved the award of a Contract. Normally, the awarding of a Contract or Bid rejection will occur within 10 calendar days after Bid opening. If the selected Bidder and CoqWA agree, this deadline may be extended, but CoqWA reserves the right: (i) to award multiple Contracts for parts of the Work; (ii) to consider such criteria as it may deem appropriate with respect to the Project; (iii) to reject any or all Bids; and/or (iv) not to proceed with the Work and/or the Project (or any part thereof); all in the exercise of its sole and absolute discretion. CoqWA will provide a written notice of its intent to award a Contract to the successful Bidder(s) (in each case, a “Notice of Intent to Award Contract”), and any submittals required to be submitted to CoqWA within a certain number of days after award is made will count from the day that the Notice of Intent to Award Contract is given. The actual award shall, however, be dependent on full execution of the Contract(s) and submission by the successful Bidder(s) of all other required documents.

EVIDENCE OF RESPONSIBILITY: Upon the request of CoqWA, a Bidder whose Bid is under consideration for the award of a Contract shall submit promptly to CoqWA satisfactory evidence showing the Bidder's financial resources, construction experience, and organization available for the performance of the Work.

RIGHT TO AWARD OR REJECT: This RFB does not obligate the CoqWA to award a contract, the CoqWA reserves the right to reject any and all proposals and to further amend or refine a proposal and negotiate a contract with one of the proposers. The CoqWA reserves the right to offer a contract to other than the lowest cost bidder based on other evaluation criteria.

CONTRACT REQUIREMENTS: It is the desire of the CoqWA to enter into a contract that includes all of the services necessary to achieve the goal of the project, whether or not those services are specifically outlined or described in this RFB. This project includes federal funds; therefore, the selected firm must be able to comply with any specific federal provisions and regulations that may apply to such a federally funded contract and may be required to sign certain assurances related to applicable federal or state laws.

WAIVER OF INFORMALITIES: The CoqWA reserves the right to waive minor informalities contained in proposals, when in the Association's sole judgment, it is in the best interest of the Watershed Associations to do so. The CoqWA reserves the right to waive minor informalities in the Bids received. The CoqWA may also reject any Bid not in compliance with all prescribed requirements, including the requirement to demonstrate the Bidder's responsibility and may reject for good cause any or all Bids upon a finding by the CoqWA that it is in the public interest to do so, in accordance with OAR 137-049-0440.

BID ERRORS AND WITHDRAW: A Bidder may withdraw its Bid at any time prior to the date and time that Bids are due, by means of written notice which is given to CoqWA before the date and time that Bids are due, at the address for submission of Bids which is given above. A Bidder may also modify and/or resubmit its Bid at any time prior to the date and time that Bids are due.

BIDDERS INTERESTED IN MORE THAN ONE BID: No person, firm, or corporation shall be allowed to make, file, or be interested in more than one Bid for the Work. However, a person, firm, or corporation which has submitted a sub-proposal to a Bidder, or which has quoted prices of materials to a Bidder, is not thereby disqualified from submitting a sub-proposal or quoting prices to other Bidders or making its own Bid.

COSTS INCURRED: The CoqWA accepts no liability for any costs incurred by respondents in the preparation or presentation of proposals.

INQUIRES: Questions concerning this request for proposals should be directed in writing to:

Restoration Project Manager – Emily Kolkemo

Email: ekolkemo@coquillewatershed.org

Each Bidder shall promptly notify CoqWA of any discovered conflicts, ambiguities, or discrepancies in or between, or omissions from, the Bid Documents. Bidders should note that questions received less than two calendar days prior to the date scheduled for opening of the Bids may not be answered. Any interpretation or correction of the Bid Documents will be made only by Addendum, and a copy of such Addendum will be sent directly to each Bidder. No oral interpretations of any provision in the Bid Documents will be made to any Bidder.

MILESTONES

Bid publishing date:	November 25, 2024
Mandatory pre-bid site visit:	December 16, 2024 at 10am
All questions related to bid are due by phone or email:	January 10, 2025
Bid due date:	January 31, 2025 by 4pm
Anticipated opening of Bids:	February 3, 2025
Contract award by:	February 14, 2025
Successful Bidder(s) to provide contract/all paperwork to CoqWA:	March 7, 2025
Site visit with selected contractor and technical advisory team:	TBD
Estimated Start date:	June 15, 2025
Completion date:	September 30, 2025

PROPOSAL INSTRUCTIONS: Bids must be received on or before 4:00 pm, on January 31, 2025: Bids shall be emailed to:

Emily Kolkemo
ekolkemo@coquillewatershed.org

Proposals shall include, at a minimum, the following items:

- A. Bid Form in Exhibit B completed.
- B. Please provide a work plan to accomplish the Project goal as described in the RFB. The work plan shall include the following:
 - a. A Summary of Work to Accomplish Objectives
 - b. Timeline
 - c. Equipment, with size expected to be on the project (Including proposed fire safety).
 - d. Personnel to be assigned (where possible, staff members and titles should be provided), and costs; considering the proposed timeline for completion of Work indicated in the RFB.
 - e. Insurance Certificate
 - f. Other Information
- C. A signed statement that you can and shall provide the Insurance requirement as listed (Schedule 4).
- D. A written statement affirming your ability to undertake and complete specific phases of this work in a timely fashion from June 15, 2025 to September 30, 2025.

Bids must not contain any erasures, interlineations, or other corrections unless each such correction is suitably authenticated by affixing in the margin immediately opposite the correction the surname or surnames of the person or persons signing the Bid, in the named person's own handwriting. In order for a Bid to be considered responsive, it must contain all of the documents and information which are required by this RFB, with signatures and notarization as indicated, and it must: (i) cover the complete scope of work as defined in the RFB; (ii) not include any exclusions or qualifications and (iii) include additive, alternate, unit and lump sum costs as listed on the bid forms. Bid prices must (where applicable) be F.O.B. at the Site, with all transportation and handling charges paid by the Bidder.

Exhibit B: BID FORM

Request for Bids for the Middle Fork Coquille River Falls Fish Passage Project

Coquille Watershed Association
Attn: Emily Kolkemo
390 N. Central Blvd.,
Coquille OR 97423
ekolkemo@coquillewatershed.org

This Bid is being made to The Coquille Watershed Association, a State of Oregon non-profit corporation (“CoqWA” or “Owner”) in the form of a sealed Bid (the “Bid”) with respect to the project known as the “Middle Fork Coquille River Falls Fish Passage Project” (the “Project”), located near Bear Creek Frontage Road in Douglas County, Oregon (the “Site”). The undersigned (“Bidder”) is making this Bid pursuant to the terms of the Request for Bids for the Project, dated November 25, 2024 (the “RFB”), a copy of which was supplied to Bidder by or on behalf of CoqWA and has been reviewed in its entirety by Bidder. The RFB and all of the documentation required of a potential bidder on the Project under the terms of the RFB are sometimes hereinafter referred to collectively as the “Bid Documents”.

Name of Bidder: _____

Business License Number: _____ Federal Tax Id No: _____

Contact Person(s): _____

Place of Residence (if individual): _____

State of Incorporation/Formation (for entities): _____

Business Mailing Address: _____

Shipping Address (if different): _____

Telephone Number: _____ Fax Number: _____

Email: _____

Pursuant to and in compliance with the RFB, the undersigned Bidder, having become familiar with the conditions at the Site and otherwise affecting the performance of the Project; the cost of the work to be done in carrying out the Project (collectively, the “Work”); the terms of the Bid Documents; and the form of the Contract to be awarded to the successful bidder (the “Contract”); hereby proposes and agrees to perform the Work within the time stipulated in the Bid Documents and to provide and furnish any and all labor, materials, equipment, transportation, utilities, and services necessary to perform and complete the Work in a workmanlike manner and in strict conformity with the requirements contained in the Bid Documents, including any addenda referenced below, for the amount(s) and/or at the rates indicated below (collectively, the “Bid Price”).

By signing and submitting this Bid to CoqWA, Bidder hereby represents, warrants, acknowledges, and agrees to and with CoqWA, or certifies to CoqWA (as applicable), as follows:

1. Bid. Bidder hereby offers to carry out and complete the Work for the Bid Price, made up of the price(s) and/or rates, and according to the budget, which are more particularly described in Schedule 1 to this Bid, and Bidder has checked all of the figures contained in this Bid carefully and understands that CoqWA will not be responsible for any errors or omissions on the part of Bidder in making this Bid.

2. Quantities. Bidder understands that the quantities mentioned in the RFB are approximate only and are subject to increase or decrease, and hereby proposes to perform all quantities of work as either increased or decreased in accordance with the terms of the Contract.

3. Bid to Remain Open. This Bid, unless withdrawn prior to the scheduled closing time for receipt of Bids, or thereafter when permitted under the terms of the RFB, shall remain valid and will not be withdrawn by the undersigned Bidder for a period of thirty (30) days after the scheduled closing time for receipt of Bids.

4. Responses to CoqWA Concerns. Bidder hereby responds to CoqWA's concerns about the following issues as indicated below, with such responses being continued/contained on attached schedules to the extent indicated below in each case:

- (a) Minority- and Women- Owned Business Enterprises. Is the Bidder's firm at least 51% minority- or women-owned, controlled and operated: ___ Yes ___ No

If the answer is "yes", identify the % of minority- or women-ownership, control and operation:

5. License(s). By execution of this Bid, the undersigned Bidder declares that Bidder holds the following license(s) relevant to the Work, in accordance with the applicable licensing laws where the Project is to take place, as follows:

Classification: _____

License number: _____

Expiration date: _____

6. Interested Persons. The names of all persons interested in this Bid as principals are as follows:

If Bidder or another interested person is a corporation, state the legal name of the corporation, its state of incorporation, and the names of the president, secretary, treasurer, and manager thereof.

If Bidder or another interested person is a partnership or other form of legal entity, state the name and form of entity, its state of formation, and the names of all the individual partners, members, joint venture's or others with an interest in the entity.

If Bidder or another interested person is an individual, the person's state of legal residence, and the first and last names in full, and give all fictitious names under which the individual does business.

7. Notices. Bidder understands that, except as noted below, notice of acceptance of this Bid, any requests for additional information, and any other notices to Bidder with respect to this Bid shall be given in writing and addressed to Bidder at the business address for Bidder which is set out above. Each such notice or request shall be deemed given either upon actual delivery (or attempted delivery) to such address (whether personally or via courier), or three calendar days after being placed in the US mail, postage prepaid, addressed to Bidder at such address. However, Bidder understands that CoqWA may, if it chooses, elect to respond by email to questions from Bidder, at the email address provided in this Bid.

8. Attachments. Attached to these Bid cover pages and incorporated into this Bid by this reference are the following required items, in the forms required under the RFB:

- (a) **Schedule 1** – Bid Price sheet with the details of the Bid Price (an Excel spread sheet may be used instead of the form provided);
- (b) **Schedule 2** – List of references for similar projects completed;
- (c) **Schedule 3** – List of proposed subcontractors and suppliers;
- (d) **Schedule 4** – Insurance requirements

9. Requirements Upon Award. If this Bid is accepted by CoqWA and notice of such acceptance is timely delivered to the undersigned, then the undersigned shall, within ten (10) days after receipt of such notice, execute and deliver to CoqWA:

- (a) the Contract, in the form required under the RFB, as prepared by CoqWA;
- (b) the insurance certificates required under the RFB and the Contract; and
- (c) such other documentation as may be required under the Contract.

Thereafter, the undersigned will commence and complete Work within the time required by the Contract.

10. Bidder's Acknowledgment, Certification, and Agreement as to its Bid. By submitting this Bid, Bidder shall be deemed to acknowledge, certify, and agree to and with CoqWA that Bidder:

- (a) has taken steps reasonably necessary to ascertain the nature of and location of the Work;
- (b) has investigated and satisfied itself as to the general and local conditions that can affect the Work or its cost, including but not limited to:
 - (1) conditions bearing upon acquisitions, transportation, disposal, handling, and storage of materials;
 - (2) the availability of labor, materials, water, electric power, and access via roads or waterway;
 - (3) uncertainties of weather, river stages, tides, or similar physical conditions at the Site;
 - (4) the conformation and condition of the ground and any shoreline or riparian area;
 - (5) the character of equipment and facilities needed preliminary to and during Work performance; and
 - (5) the Site's biological, chemical, and associated physical hazards;
- (c) has satisfied itself as to the character, quality, and quantity of surface and subsurface materials or obstacles to be encountered, insofar as this information is reasonably ascertainable from inspection of the Site as well as from Bid Documents and other information made a part of RFB; and
- (d) has satisfied itself as to the adequacy of time allowed for the completion of the Work.

11. Addenda. Bidder has received, reviewed, and understands, the following Addenda to the original Bid Documents (list all Addendums associated with this Bid packet):

Addendum Number	Date of Addendum

In witness whereof, this Bid is being executed and delivered by Bidder as of the date(s) set forth below

If Bidder consists of or includes one or more corporations, partnerships, or other forms of legal entity, the full legal name of the entity shall be set forth in the signature block below, together with the signature(s) of the officers, partners, or other individuals authorized to sign contracts on behalf of and to bind the entity.

By: _____
(Signature)

Print Name: _____

Print Title: _____

Print Date: _____

If Bidder consists of or includes one or more individuals, the following form of signature block is to be used for each of such individuals:

Signature: _____

Print Name: _____

Print Date: _____

Schedule 1

Bid Price Sheet: Please provide cost estimates for each Bid item. A total cost estimate is required. If more line items are needed, please attach a budget with breakdowns for each cost.

Component 1: Access Modifications.

Bid Item	Units	Contract Quantity	Unit Price	Total
Equipment Mobilization				
Labor and equipment for traffic control (including signage)				
Remove, protect, and reassemble guardrail (including installation of new posts)				
Install and remove pavement protection (materials and labor)				
Temporary crossing: culvert installation and removal				
Material costs: Temporary crossing (min. 18-inch x 20LF culvert, backfill and access rock) includes delivery charge				
Temporary channel access construction, maintenance, removal				
Material costs: Temporary channel access (riprap and access rock) includes delivery charge				
Fire watch, fire tools, water truck & pumps				
Erosion/environmental control: silt fences, stockpiling, weed free straw and seeding (materials and labor)				
Coordination: site visit, coordination with engineer/CoqWa for temp crossing plan, dewatering plan, temp access plan)				
Other: Please line item and justify additional expenses (such as material and supplies) for the completion of this project.				
Total:				

Component 2: Channel modifications.

Bid Item	Units	Contract Quantity	Unit Price	Total
Equipment Mobilization				
Labor and equipment to modify boulders, re-grade channel, and place streambed matrix				
Material costs (berm rock, streambed matrix) include delivery charge				
Care and Diversion of Waters: Labor and equipment to construct/notch fish-exclusion berm, install work isolation (including fish block net, dewatering pumping equipment)				
Turbidity monitoring and reporting				
Fire watch, fire tools, water truck & pumps				
Other: Please line item and justify additional expenses (such as material and supplies) for the completion of this project.				
Total:				

Schedule 2

Bidder's References for Similar Projects Completed

Please list references, including name, address, and telephone number of those who have personal knowledge of Bidder's abilities to undertake and complete projects of similar scope and complexity.

Project Name	Reference	Address	Telephone Number

References will be contacted. If possible, provide a brief description of each project.

Schedule 4

Insurance and Security

*Contractor is responsible to comply with all federal, state, county and local laws, ordinances and regulations applicable to this contract. At the time or request for Bid the information listed below was known additional coverages may be required or change.

INSURANCE: The CoqWA shall have no obligation to CONTRACTOR until CONTRACTOR has fully complied with the following requirements. CONTRACTOR must carry insurance policies offering the following minimum coverage levels and provide Certificates of Coverage to the CoqWA and landowner(s) before work commences.

_____ Commercial General Liability*

- \$1,000,000 Each Occurrence
- \$2,000,000 Policy Aggregate
- \$5,000 Premise Medical

*All covering operations, completed operations, contract disputes and personal injuries

_____ Automobile –Liability covering owned, hired and non-owned vehicles.

- \$1,000,000 combined single limit

_____ State or Private Accident Insurance – Workers Compensation


_____ Professional Liability

- \$1,000,000 Each Occurrence
- \$2,000,000 Policy Aggregate

The above polices as shall reference as additional insured as follows and copies be provided to:

Coquille Watershed Association
390 N Central Blvd.
Coquille, OR 97423

Exhibit C: MAPS & PROJECT PHOTOGRAPHS

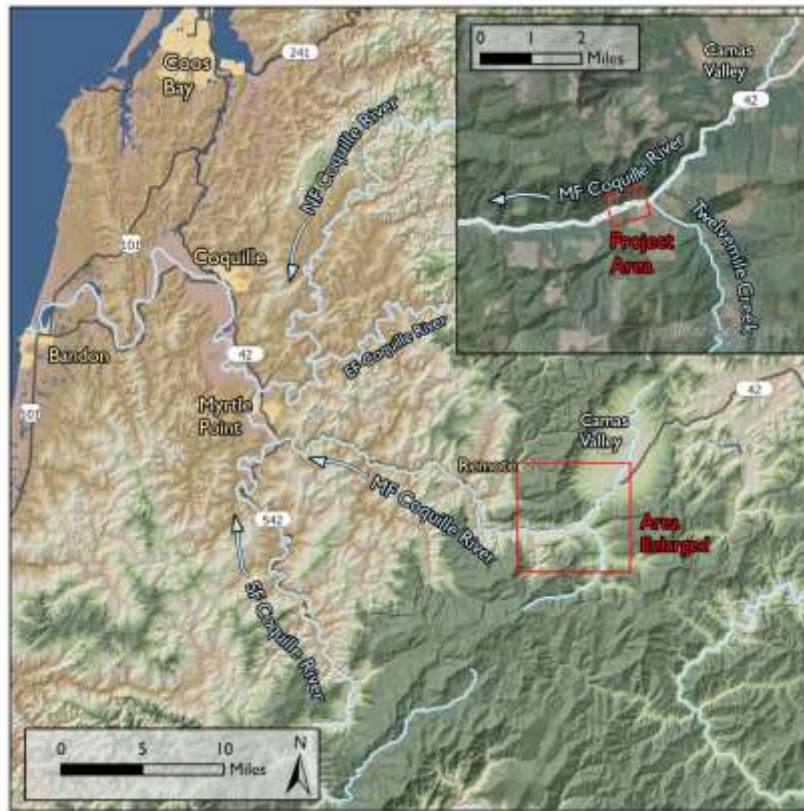

General site location and project area maps.

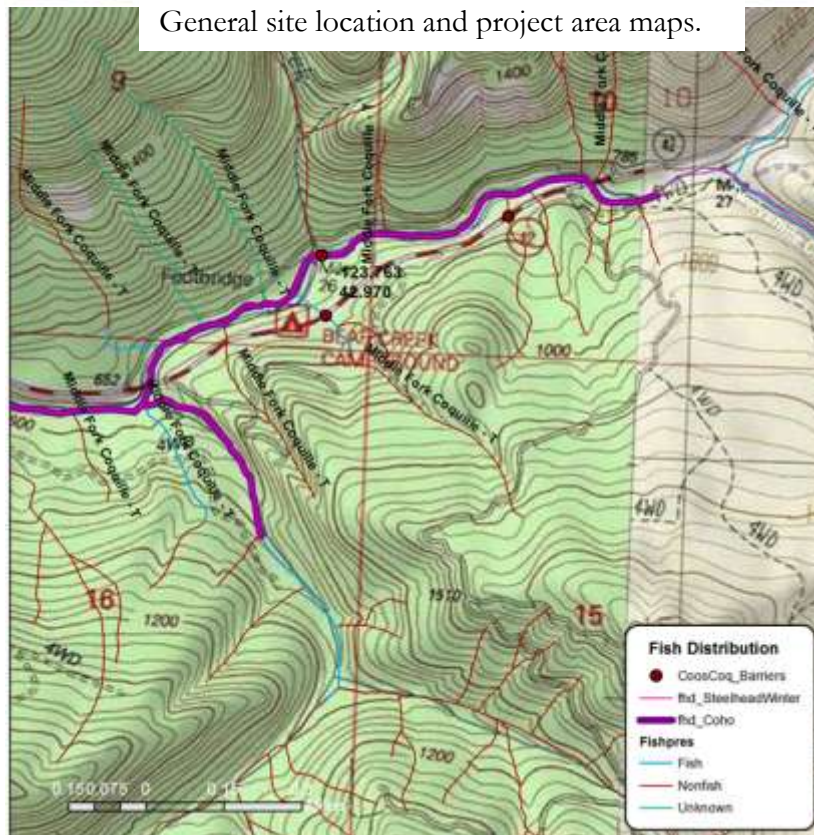




Figure 1: Aerial photo of project area. Courtesy PaleoWest



Figure 2. Looking upstream at Middle Fork Coquille Falls, with person for scale.



Figure 3. On top of Middle Fork Coquille Falls, looking downstream.



Figure 4. Falls location as seen from road.